EF/BF Series Sewage Pump




APPLICATIONS


Basement wastewater discharge, septic tank pumping, waste water discharge, industrial water treatment, animal husbandry wastewater discharge.

FEATURES

- Dependable laminated sheet of Si steel is adopted to sewage pump; shaft and rotor are machining precisely to raise stability and efficiency of sewage pump. Motor frame, shaft, screws are made of stainless steel to provide long service life and attractive
- Sewage pump's Impeller is designed to special water flow, muddy liquid and other various wastewater can be efficiently drained. The product range is up to 15 HP, dual SIC mechanical seals is built in (above 1.5 HP).

 Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
- 3.
- Sewage pump's design to easily disassemble motor and pump housing for maintenance.
- Float switch is available for model under 2 HP.



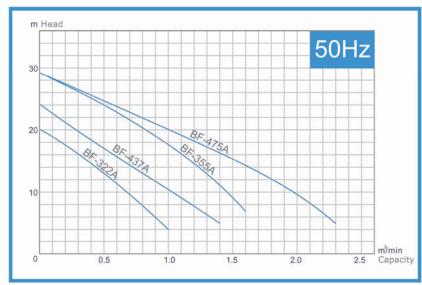

SPECIFICATIONS

of Lon Toxillorio										
		Ontlet		Performance		Free		1		
Model	Power	Diameter	Phase	Head	Flow	Passage	Length	Width	Height	Weight
	HP (kW)	inch	Ø	m	m³/min	mm	mm	mm	mm	kg
EF-207	1 (0.75)	2"	(1ø 220V) / (3ø 380V)	9	0.2	12	260	210	460	19
BF-205	1/2 (0.4)	2"	1 <i>∲</i> 220V	8	0.1	10	230	160	345	15
BF-B315	2 (1.5)	3"	(1¢ 220V) / (3¢ 380V)	8	0.5	20	370	220	590/530	41/38
BF-322A	3 (2.2)	3"	3 <i>∲</i> 380V	13	0.5	30	440	255	550	49
BF-437A	5 (3.7)	3" / 4"	3 <i>∮</i> 380V	17	0.5	35	440	255	560	55
BF-355A	7½ (5.5)	3" / 4"	3 <i>∮</i> 380V	24	0.5	35	470	250	570	60
BF-475A	10 (7.5)	4"	3 <i>∮</i> 380V	20	1.0	40	560	310	700	102